



**EXTREME  
TEMPERATURE**

- **Stable to 500°F**
- **Cut and Abrasion Resistant**
- **Halogen Free**
- **Resists Gasoline and Engine Chemicals**


## Silicone Jacketed Fiberglass Resists Heat, Abrasion, & Moisture



Techflex silicone jacketed fiberglass is tested under pressure to destruction to ensure reliable fire protection for your fuel and hydraulic lines.



FireFlex Seal Tape works perfectly in conjunction with FireFlex...it seals the ends of your application, providing a neat, insulated termination. For more info go to page 95.

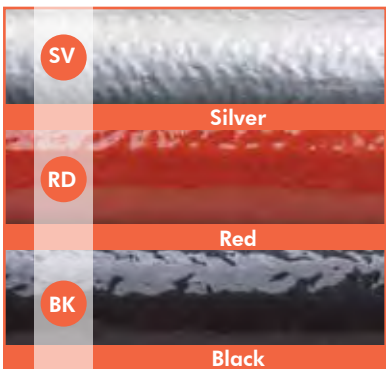

Silicone jacketed fiberglass sleeving is the choice of professionals in racing and other industries where protection from constant temperatures approaching 500°F is mandatory.

FIREFLEX (FIN) fiberglass/silicone sleeving is engineered to protect hoses, cables, and wire harnesses from damage due to exposure to extreme heat, open flame, molten splash, and welding sparks. The thick, high temperature fiberglass sleeve is jacketed with a non-permeable, heavy silicone coating that is flexible enough to follow tight radius curves, resists all automotive chemicals and solvents, and provides a substantial level of abrasion and puncture protection.

FireFlex firesleeve is completely non-conductive, will not melt, delaminate, become brittle, or support combustion under normal conditions. It provides a professional level solution to thermal protection needs in any application.

Nominal Size	Part #	Dash No.	Wall Thickness ±.010"	Standard Spool Put-Ups		Available Colors	Lbs/100'
				Bulk Spool	Shop Spool		
1/4"	FIN0.25	-04	.072"	100'	50'	SV, RD & BK	4.80
3/8"	FIN0.38	-06	.072"	100'	50'	SV, RD & BK	6.30
1/2"	FIN0.50	-08	.072"	100'	50'	SV, RD & BK	7.40
5/8"	FIN0.63	-10	.072"	100'	50'	SV, RD & BK	8.80
3/4"	FIN0.75	-12	.072"	50'	25'	SV, RD & BK	9.80
7/8"	FIN0.88	-14	.072"	50'	25'	SV, RD & BK	10.10
1"	FIN1.00	-16	.072"	50'	25'	SV, RD & BK	13.50
1 1/4"	FIN1.25	-20	.072"	50'	25'	SV, RD & BK	14.00
1 1/2"	FIN1.50	-24	.072"	50'	25'	SV, RD & BK	14.70
1 3/4"	FIN1.75	-28	.072"	50'	25'	SV, RD & BK	16.30
2"	FIN2.00	-32	.072"	50'	25'	SV, RD & BK	20.50
2 1/4"	FIN2.25	-36	.072"	50'	25'	SV, RD & BK	22.90
2 3/8"	FIN2.38	-38	.072"	50'	25'	SV, RD & BK	26.90
2 1/2"	FIN2.50	-40	.072"	50'	25'	SV, RD & BK	28.30
2 3/4"	FIN2.75	-44	.072"	50'	25'	SV, RD & BK	30.10
2 7/8"	FIN2.88	-46	.072"	50'	25'	SV, RD & BK	32.00
3"	FIN3.00	-48	.072"	50'	25'	SV, RD & BK	33.40
3 1/2"	FIN3.50	-56	.072"	25'	-	SV, RD & BK	37.20
4"	FIN4.00	-64	.072"	25'	-	SV, RD & BK	40.10

Dash numbers refer to the inside diameter (ID) of the sleeve. Please measure the outside diameter (OD) of the hose you are protecting to ensure proper fit.

1-973-300-9242  
www.techflex.com

